



TLHBS-180S




TLHBS-290



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
 ** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture.
 Actual production units may vary from the values reported here by up to ±10%.

Product Description:

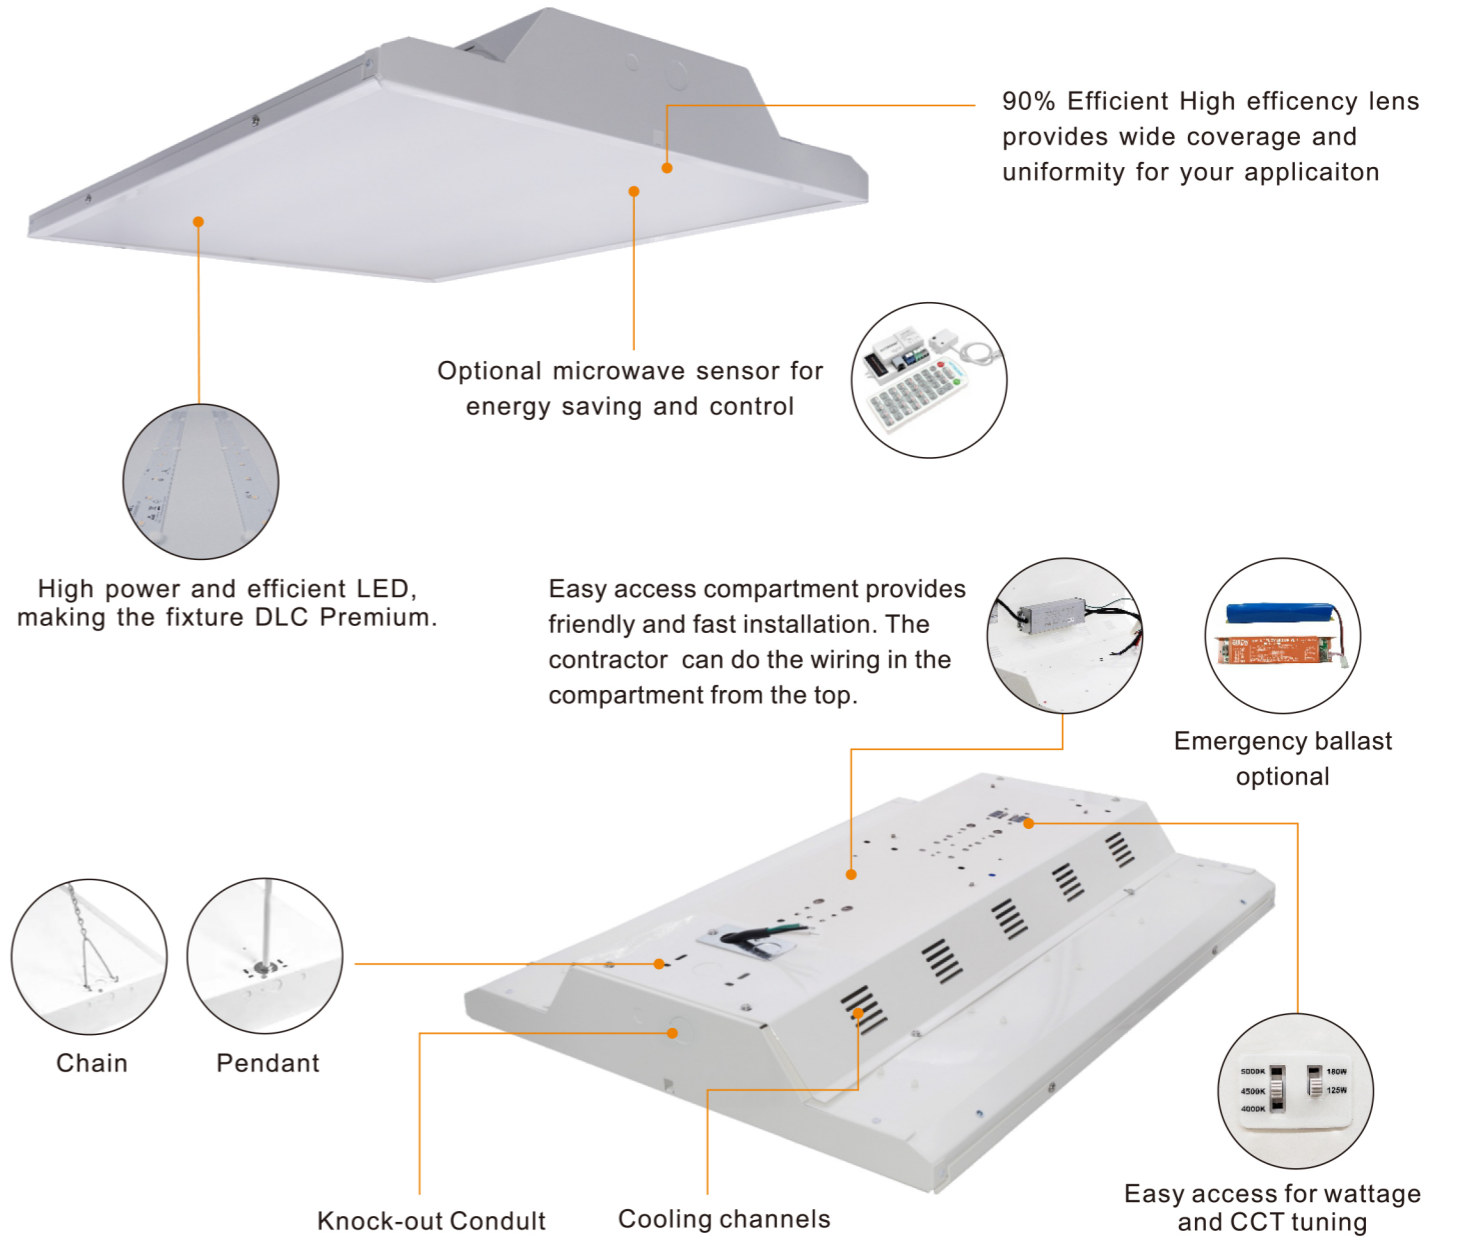

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
 ** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture.
 Actual production units may vary from the values reported here by up to ±10%.



Product Description:

With its slim design, this new High Bay from Tishman seamlessly blends high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. With its built-in J-box design, this fixture is installation friendly. Ideal for office spaces, supermarkets, and meeting rooms.

Features:

LISTING

▶ NOM

HOUSING

▶ Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

▶ Suitable for use in -40°C to +50°C

EFFICACY

▶ Up to 145 lumens per watt (see individual wattage data)

CCT AND CRI

▶ 4000K and 5000K CCT available, 80CRI

OPTICS

▶ Transparent lens or Frosted lens producing superior uniformity.

ELECTRICAL

▶ Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard); 50/60Hz;

▶ 4KV Surge protector per ANSI/IEEE C62.412;



▶ Dimming 0-10V driver Standard.

▶ Microwave Motion Sensor optional.

FINISHES

▶ Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.

Dimension:

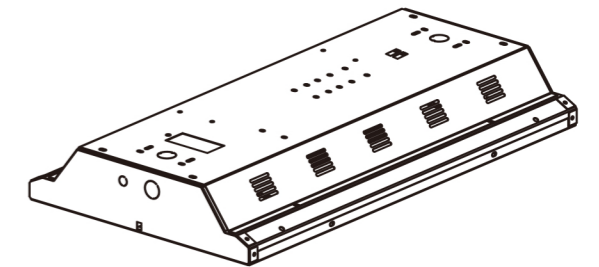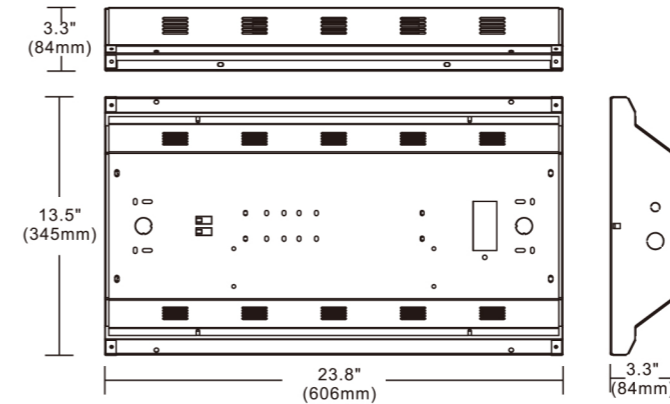

TLHBS-180



Performance Data:

Model NO.	Nominal Watts	Dist. Type	Lumen*	Efficacy*
TLHBS-180S	180/125W	Type V	26061 lm*	154 lm/w*
TLHBS-290	290/200W	Type V	44714 lm*	159 lm/w*

* Lumen and Efficacy are based on highest wattage 4500K

Specification:

Model No.	Nominal Watts	Input Voltage	CRI	Color Temp	Sensor	Finish	Option
TLHBS-180S	180=180W	UNV=120-277VAC	8=80+	40=4000 K	BLANK=No Sensor	WH=White	EM=(Emergency Battery Back Up)
TLHBS-290	270=270W	HV4 =277-480VAC		45= 4500 K 50=5000 K	MS=Microwave Sensor OS = Occupancy Sensor PC = Photocontrol		

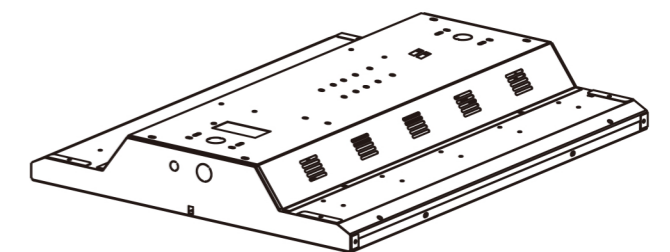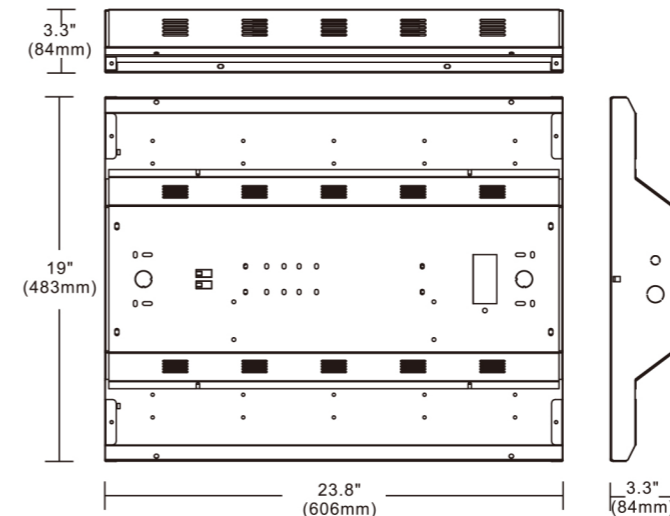

TLHBS-290

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.